


CÔTES D'ENCOMBREMENT DES TAMBOURS MOTEURS ET TAMBOURS LIBRES



TAMBOUR MOTEUR

TYPE	Ø	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
TM-R	160	27	35	24	166	27	20	72	100	8	-		12	7	17	17	38
TM-A	215	27	35	24	217	27	20	72	100	13	-		12	7	17	17	38
TM-D	250	27	35	24	243	27	20	72	100	13	-		12	7	17	17	38
TM-C	315	27	35	24	320	27	20	72	100	13	-		12	7	17	17	38
TM-G	400	59	50	40	417	40	40	95	175	13	13		24	7	39	39	63
TM-K	500	59	68	50	505	40	40	95	175	13	13		24	7	39	39	63
TM-E	315	50	50	40	320	40	40	95	175	13	-		24	7	30	30	63

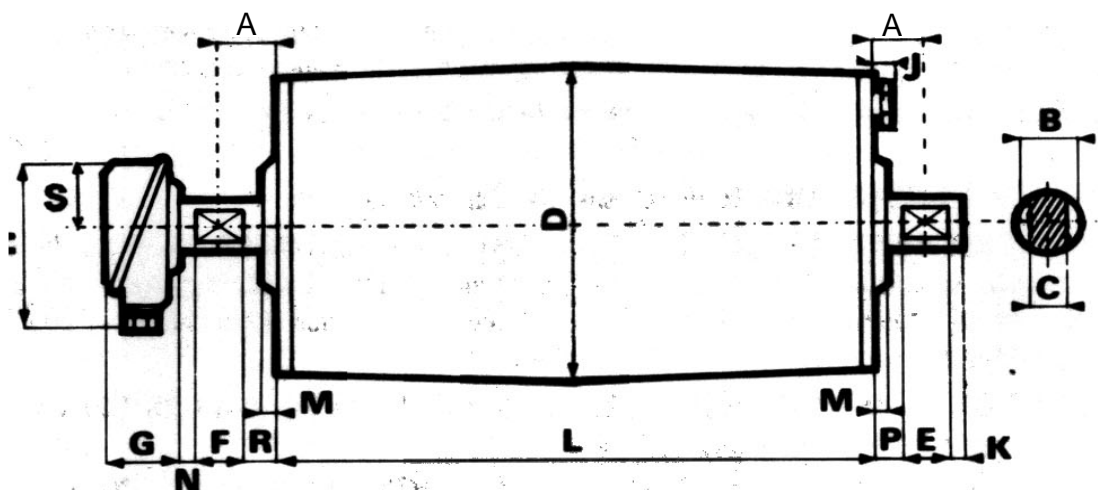

TAMBOUR LIBRE

TYPE	Ø	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
TQ-R	160	12	17	40	166	35	24	-	-	-	-		-	-	-	-	-
TQ-A	215	12	17	40	217	35	24	-	-	-	-		-	-	-	-	-
TQ-D	250	12	17	40	243	35	24	-	-	-	-		-	-	-	-	-
TQ-C	315	12	17	40	320	35	24	-	-	-	-		-	-	-	-	-
TQ-G	400	24	39	53	417	50	40	-	-	-	-		-	-	-	-	-
TQ-K	500	24	39	53	505	68	50	-	-	-	-		-	-	-	-	-
TQ-E	315	24	30	40	320	50	40	-	-	-	-		-	-	-	-	-

