


CÔTES D'ENCOMBREMENT DES TAMBOURS MOTEURS ET TAMBOURS LIBRES

TAMBOUR MOTEUR

TYPE	Ø	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
TM- R	160	27	35	24	166	27	20	72	100	8	-		12	7	17	17	38
TM- A	215	27	35	24	217	27	20	72	100	13	-		12	7	17	17	38
TM- D	250	27	35	24	243	27	20	72	100	13	-		12	7	17	17	38
TM- C	315	27	35	24	320	27	20	72	100	13	-		12	7	17	17	38
TM- G	400	59	50	40	417	40	40	95	175	13	13		24	7	39	39	63
TM- K	500	59	68	50	505	40	40	95	175	13	13		24	7	39	39	63
TM- E	315	50	50	40	320	40	40	95	175	13	-		24	7	30	30	63

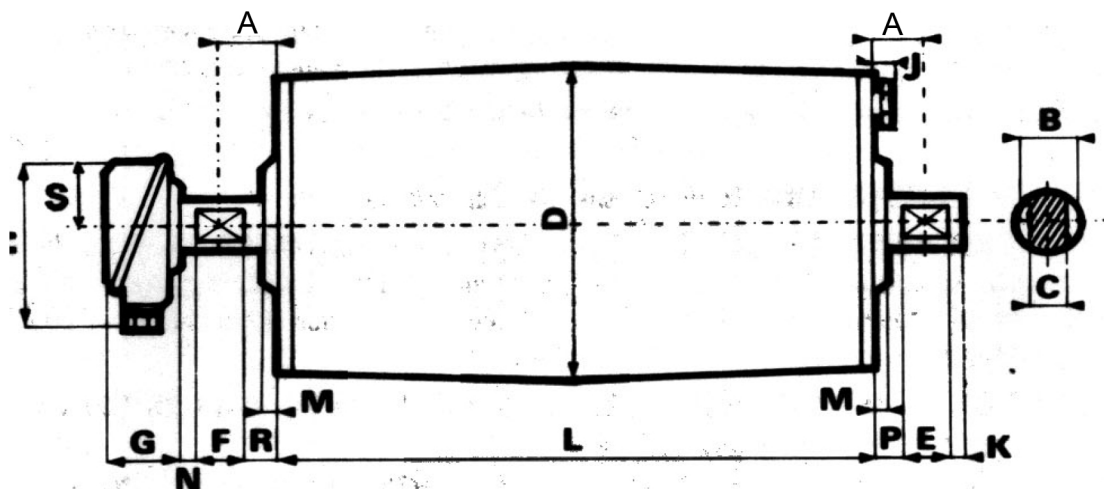

TAMBOUR LIBRE

TYPE	Ø	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
TQ- R	160	12	17	40	166	35	24	-	-	-	-		-	-	-	-	-
TQ- A	215	12	17	40	217	35	24	-	-	-	-		-	-	-	-	-
TQ- D	250	12	17	40	243	35	24	-	-	-	-		-	-	-	-	-
TQ- C	315	12	17	40	320	35	24	-	-	-	-		-	-	-	-	-
TQ- G	400	24	39	53	417	50	40	-	-	-	-		-	-	-	-	-
TQ- K	500	24	39	53	505	68	50	-	-	-	-		-	-	-	-	-
TQ- E	315	24	30	40	320	50	40	-	-	-	-		-	-	-	-	-

